

144F Fiber Optic Splice Closures


6 Trays, 6x24 Fibers

Features

- May be used for cut, uncut and taut sheath applications.
- May be used for all fiber optic cable.
- Sheath retention & central strength member fasten system included.
- Closure construction and lightweight plastic provides strength and resistance to chemical and U.V attack
- Installation and reentry with a minimum of tools
- All hardware are included
- Protection class: IP68
- RoHS compliance

Application

Underground, Aerial, Vault, Pole Mounting and Wall Mountable

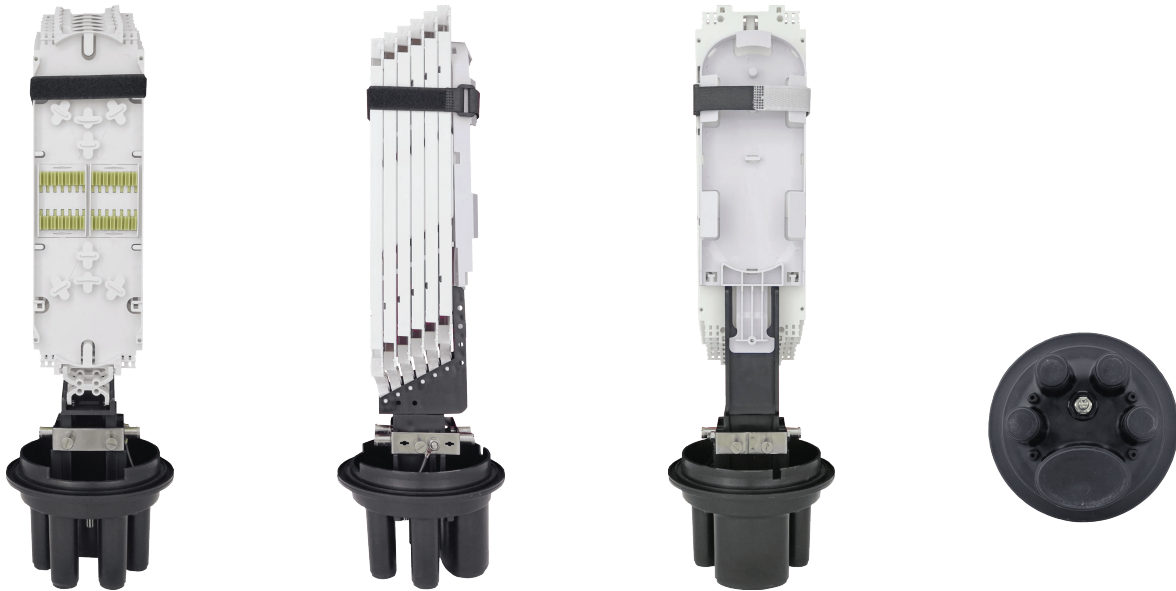

Specifications

Model No.	YT00973 SSC-540170-4P-144-6T/6T-T102A 540x170m, 144 Fibers Capacity, 6 Trays, 4 Port, Enclosure , w/o Mounting Kits
Spliced Fiber Storage Capacity	144 splices (6x24)
Size Height x Diameter	540mm x 170mm (w/o clamp) 540mm x 220mm (w/ clamp)
Cable Ports	1 oval port (25mm), 4 round ports (20mm)
Mounting Kits	Wall Mounting Kit - 1 Wall Mounting Kit - 2 Wall Mounting Kit - 3 Pole Mounting Kit - 1 Pole Mounting Kit - 2 Pole Mounting Kit - 3

See Other Document